

ALY WILSON QUILTS

2026 SAWTOOTH SAMPLER - BLOCK OF THE MONTH

Fabric Requirements and Setting Instructions


Finished Quilt Size 69 ½" x 69 ½"

PATTERN NOTES, ABBREVIATIONS AND BOM INFORMATION

- Sew with a $\frac{1}{4}$ " seam allowance throughout, unless noted.
- For best fabric nesting results, follow pressing arrows shown in the pattern, unless otherwise stated.
- Blocks or units may be assembled larger to allow for precise trimming throughout.
- The use of directional fabric may alter the yardage requirements.
- Abbreviations to note:
 - RST - Right Sides Together
 - HST - Half Square Triangle(s)
 - WOF - Width of Fabric, 42" - 44"
 - HWOF - Half Width of Fabric, 21" - 22"
 - LOF - Length of Fabric
- Two center blocks will be released each month and will measure 6" x 6" finished.
- All blocks are traditionally pieced without the use of foundation paper, templates or speciality rulers.
- Blocks will be released the 3rd Tuesday of each month.
- For pattern corrections visit www.alywilsonquilts.com or contact at alywilsonquilts@gmail.com

NOTES

SETTING LAYOUT

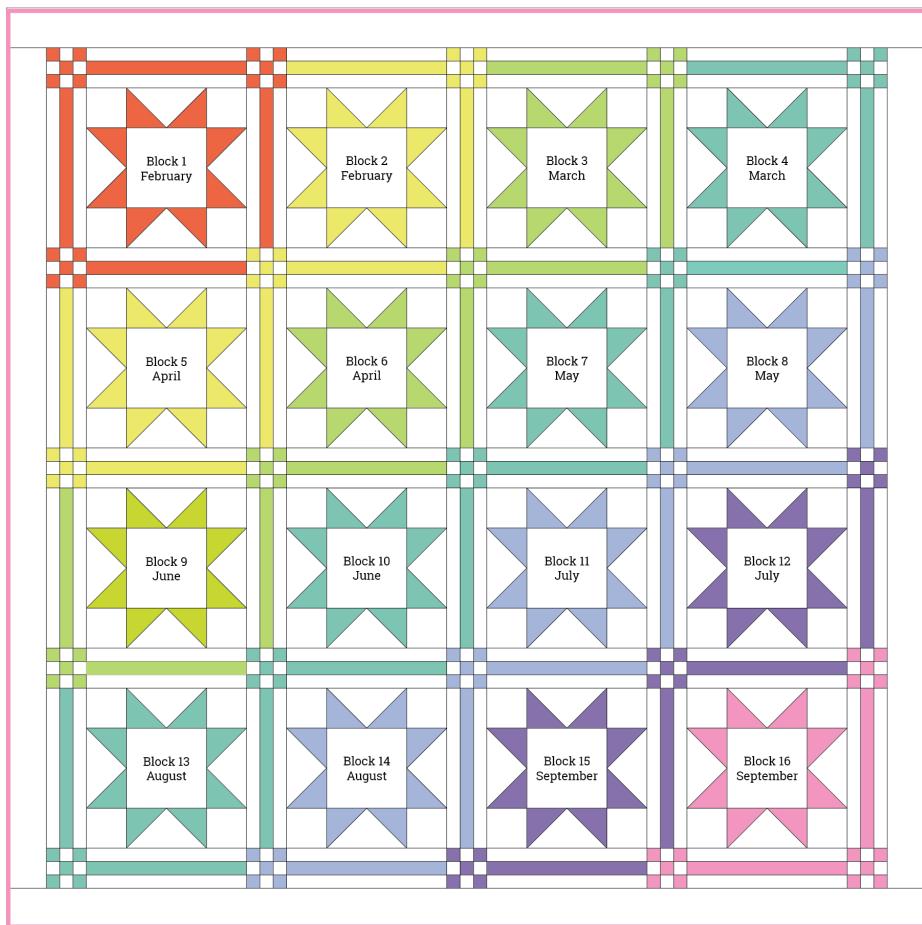

SETTING AND QUILT FABRIC REQUIREMENTS

General Fabric Requirements	
Background	4 1/2 yards
Binding	3/4 yard
Backing	2 1/4 yards of 108" or 4 1/2 yards for a seamed back


Setting and Sawtooth Fabric Requirements	
Fabric 1	1 Fat Quarter
Fabric 2	3/8 yard
Fabric 3	1/2 yard
Fabric 4	1/2 yard
Fabric 5	1/2 yard
Fabric 6	3/8 yard
Fabric 7	1 Fat Quarter

Monthly Center Block Fabric Requirements	
Fabric 8	
Fabric 9	
Fabric 10	
Fabric 11	
Fabric 12	
Fabric 13	
Fabric 14	

SETTING FABRIC CUTTING

Background, Border and Binding Fabric Cutting		
Background Fabric	0-A	(16) 7 1/4" x 7 1/4"
	0-B	(64) 3 1/2" x 3 1/2"
	0-C	(21) 1 1/2" x HWOF
	0-D	(80) 1 1/2" x 12 1/2"
Border Fabric		(8) 3 1/2" x WOF
Binding Fabric		(8) 2 1/2" x WOF

FABRIC SWATCHES

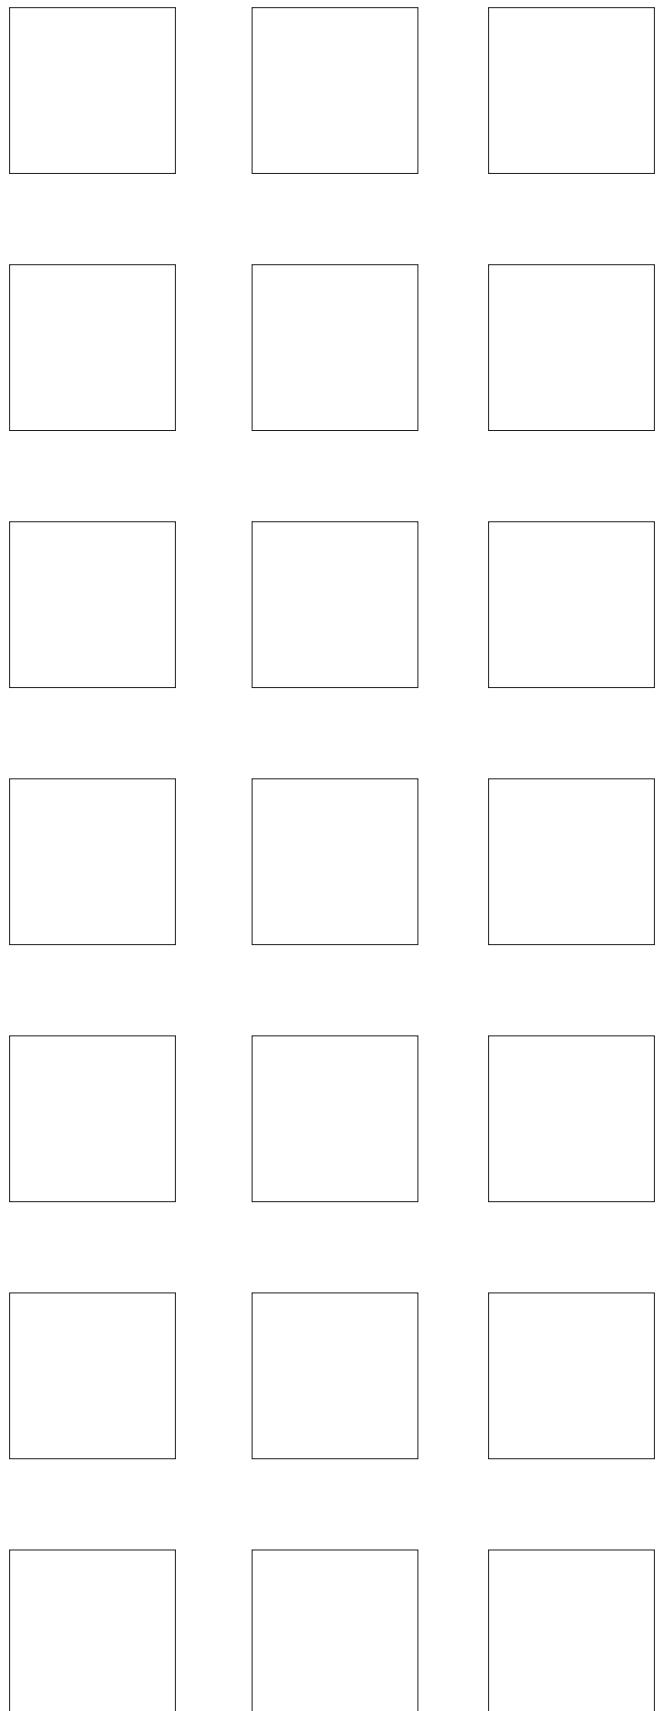


9-Patch, Sashing and Sawtooth Fabric Cutting

Fabric 1 	1-A	(4) 3 7/8" x 3 7/8"
	1-B	(3) 1 1/2" x HWOF
	1-C	(4) 1 1/2" x 12 1/2"
Fabric 2 	2-A	(8) 3 7/8" x 3 7/8"
	2-B	(3) 1 1/2" x HWOF
	2-C	(6) 1 1/2" x 12 1/2"
Fabric 3 	3-A	(12) 3 7/8" x 3 7/8"
	3-B	(3) 1 1/2" x HWOF
	3-C	(8) 1 1/2" x 12 1/2"
Fabric 4 	4-A	(16) 3 7/8" x 3 7/8"
	4-B	(3) 1 1/2" x HWOF
	4-C	(10) 1 1/2" x 12 1/2"
Fabric 5 	5-A	(12) 3 7/8" x 3 7/8"
	5-B	(3) 1 1/2" x HWOF
	5-C	(6) 1 1/2" x 12 1/2"
Fabric 6 	6-A	(8) 3 7/8" x 3 7/8"
	6-B	(3) 1 1/2" x HWOF
	6-C	(4) 1 1/2" x 12 1/2"
Fabric 7 	7-A	(4) 3 7/8" x 3 7/8"
	7-B	(3) 1 1/2" x HWOF
	7-C	(2) 1 1/2" x 12 1/2"




SAWTOOTH STAR SAMPLER SETTING INSTRUCTIONS


1. Draw a line diagonally on the wrong side of all (4) Fabric 1-A squares.
With RST, place (1) Fabric 1-A squares on the top left and (1) on the bottom right corner of (1) Fabric 0-A square.
Sew a $\frac{1}{4}$ " away from both sides of the drawn line.
Trim on the drawn line.
Press according to the arrows.

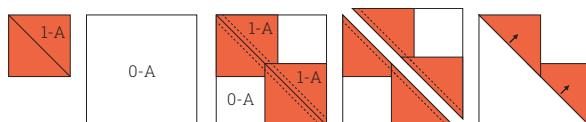


With RST, place the remaining (2) Fabric 1-A squares at the bottom left corners of the (2) units as shown.
Sew a $\frac{1}{4}$ " away from both sides of the drawn line.
Trim on the drawn line.
Press according to the arrows.
The flying geese units should measure $3\frac{1}{2}$ " x $6\frac{1}{2}$ ".

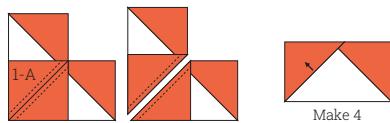


Repeat this step using the all the remaining Fabric 0-A and Fabric 2-A thru 7-A squares.



2. Using (1) Fabric 1-B and (2) Fabric 0-C rectangles, sew together the strip unit as shown.
Press according to the arrows.
The strip unit should measure $3\frac{1}{2}$ " x HWOF.

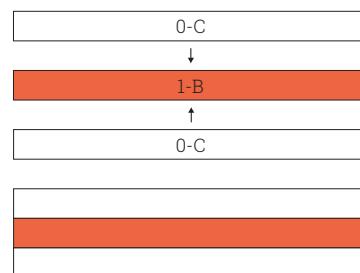


Subcut the strip unit into $3\frac{1}{2}$ " x $1\frac{1}{2}$ " units.




Repeat using (1) Fabric 2-B thru 7-B and (2) Fabric 0-C rectangles as shown.

3. Using (2) Fabric 1-B and (1) Fabric 0-C rectangles, sew together the strip unit as shown.
Press according to the arrows.
The strip unit should measure $3\frac{1}{2}$ " x HWOF.

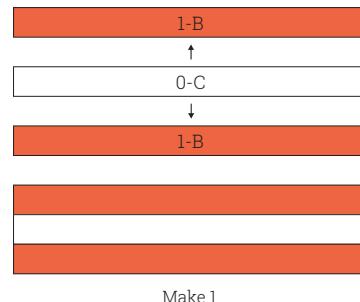


Subcut the strip unit into $3\frac{1}{2}$ " x $1\frac{1}{2}$ " units.




Repeat using (2) Fabric 2-B thru 7-B and (1) Fabric 0-C rectangles as shown.

SAWTOOTH STAR SAMPLER SETTING INSTRUCTIONS


4. Using the subcut units from steps two and three, sew together the nine patch units as shown. Press according to the arrows. The units should measure 3 1/2" x 3 1/2".




Repeat for Fabrics 2 thru 7 as shown.
*You will not use all the subcut pieces.




5. Using (2) Fabric 0-D and (1) Fabric 1-C, sew together the sashing unit as shown. Press according to the arrows. The sashing units should measure 3 1/2" x 12 1/2".

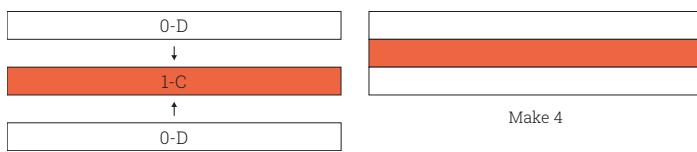

Repeat with the remaining Fabric 0-D and Fabric 2 thru 7-C rectangles.

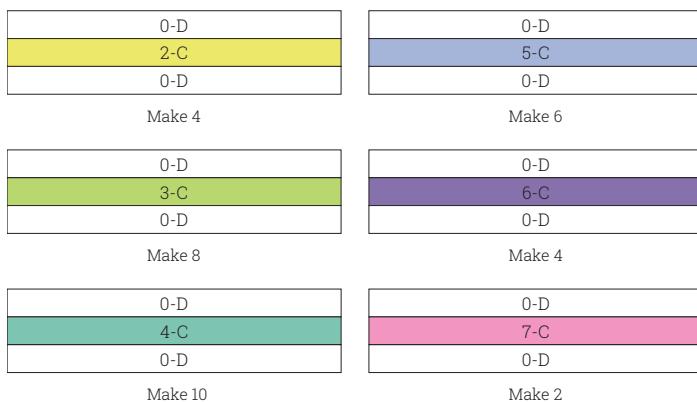

6. (4) Fabric 0-B squares, (4) flying geese units from step one and each monthly block are used for the Sawtooth Star Block setting. Press as desired. Each block should measure 12 1/2" x 12 1/2".

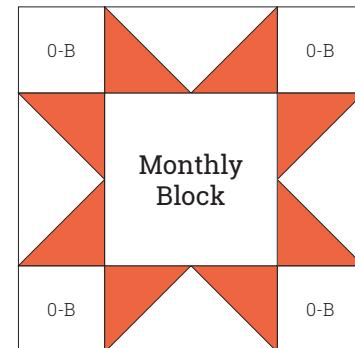

7. Once all blocks are complete, use the quilt image to guide layout placement using the 9-patch blocks and sashing units made in steps four and five. Press as desired. The quilt top, without borders, should measure 63 1/2" x 63 1/2".

8. Sew together (8) border strips end to end. Subcut into the following lengths:

(2) 3 1/2" x 63 1/2" for left and right borders
(2) 3 1/2" x 69 1/2" for top and bottom borders

Sew on left and right borders first, followed by the top and the bottom borders.

Press seams towards the borders.

The quilt top, with borders, should measure 69 1/2" x 69 1/2".

9. Prepare backing for quilting using preferred method.

10. With RST, sew together (8) binding strips end to end using preferred binding construction method.

11. Quilt and bind as desired.

share your block



#alywilsonquiltsBOM
#alywilsonquilts

SAWTOOTH STAR SAMPLER SETTING FABRIC LABELS

Background Fabric	0-A	0-B	0-C	0-D	Binding
Fabric 1	1-A	1-B	1-C	Fabric 8	Borders
Fabric 2	2-A	2-B	2-C	Fabric 9	Backing
Fabric 3	3-A	3-B	3-C	Fabric 9	
Fabric 4	4-A	4-B	4-C	Fabric 11	
Fabric 5	5-A	5-B	5-C	Fabric 12	
Fabric 6	6-A	6-B	6-C	Fabric 13	
Fabric 7	7-A	7-B	7-C	Fabric 14	



SAWTOOTH SAMPLER COLORING PAGE

